

## C9B-B

### 900mm Two Burner/Griddle Gas Cooktop Bench Model



C9B-B

- Countertop Bench Model
- 900mm wide
- 2 open burners
- 600mm griddle plate
- 5kW open burner rating
- Flame failure standard on open burners
- Optional pilot and flame failure on open burners
- Cast iron burners and vitreous enamel potstands
- 2 griddle burner with pilot, flame failure and piezo ignition
- Griddle plate machine finished 12mm thickness
- Adjustable bench feet
- Stainless steel finish

#### Also Available



C9A-B



C9C-B



C9D-B

#### OVERALL CONSTRUCTION

- Cast iron open burner heads with vitreous enamelled cast iron caps
- Vitreous enamelled potstands
- Vitreous enamelled control panel
- 12mm machined surface mild steel griddle plates
- Stainless steel front, sides and splashback
- Stainless steel spill tray
- Griddle section are standard on RH side only
- 63mm dia. stainless steel adjustable bench feet

#### CONTROLS

- Large easy use control knobs
- Variable high to low controls to open and griddle burners
- Flame failure standard on open burners
- Griddles standard with pilot, flame failure and piezo ignition

#### CLEANING AND SERVICING

- Easy clean stainless steel exterior
- Vitreous enamelled potstands and burner caps
- Lift off open burner caps and removable burners
- Removable spill trays
- Stainless steel grease trays on griddle
- Access to all parts from front of unit

#### Matching Products



CR9D



CR6C



CF2



C9C



C6D



C450



CP4



CS9 / C900-S




CT6



C300

## C9B-B

### 900mm Two Burner/Griddle Gas Cooktop Bench Model

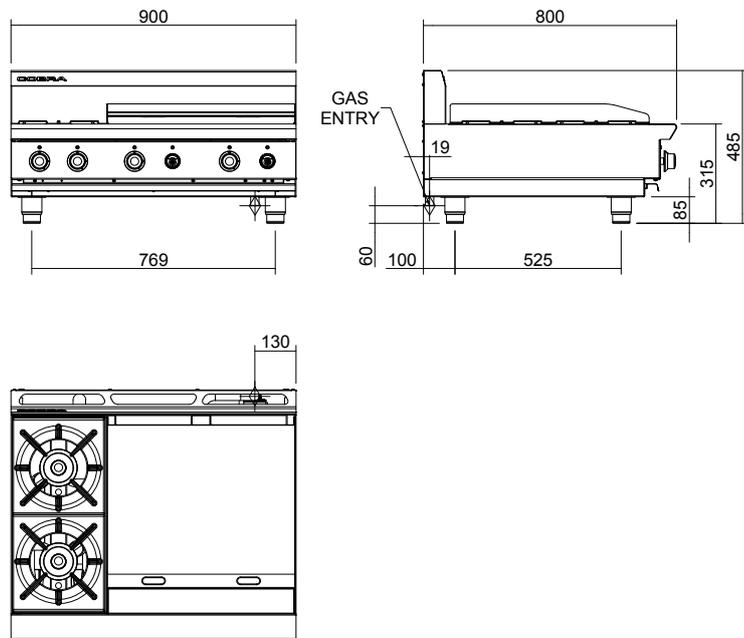

C9B-B

#### SPECIFICATIONS

##### Burners

Open Burners;

Natural Gas

5.0kW each

Propane gas

4.6kW each

Griddle Burners;

5.0kW per 300mm section

Gas power

Natural gas

20.0kW (nett), 75,790 Btu/hr (gross)

Propane gas

19.2kW (nett), 68,240 Btu/hr (gross)

Gas flow rate

Natural gas 2.12m<sup>3</sup>/hr

Propane gas 1.50kg/hr

Gas connection

R 3/4 (BSP) male

130mm from RH side, 20mm from rear, and 60mm from bench

##### Dimensions

Width 900mm

Depth 800mm

Height 315mm

Incl. splashback 485mm

Nett weight

71.5kg

Packing data

0.72m<sup>3</sup>, 108kg

Width 1010mm

Depth 955mm

Height 750mm

Gas types

Available in Natural gas and Propane gas, please specify when ordering

Other gas types on request

[blue-seal.co.uk](http://blue-seal.co.uk)

United Kingdom

[blue-seal.co.uk](http://blue-seal.co.uk)

Blue Seal Limited

Unit 67

Gravelly Business Park

Gravelly

Birmingham B24 8TQ

England

Telephone 0121-327 5575

Facsimile 0121-327 9711

[sales@blue-seal.co.uk](mailto:sales@blue-seal.co.uk)

Australia

[moffat.com.au](http://moffat.com.au)

Moffat Pty Limited

740 Springvale Road

Mulgrave, Victoria 3170

Australia

Telephone +613-9518 3888

Facsimile +613-9518 3833

[vsales@moffat.com.au](mailto:vsales@moffat.com.au)

New Zealand

[moffat.co.nz](http://moffat.co.nz)

Moffat Limited

Rolleston

45 Illinois Drive

Izone Business Hub

Rolleston 7675

Telephone +64 3-983 6600

Facsimile +64 3-983 6660

[sales@moffat.co.nz](mailto:sales@moffat.co.nz)



ISO9001  
Quality  
Management  
Standard

Designed and manufactured by



ISO9001

All Cobra products are designed and manufactured by Moffat using the internationally recognised ISO9001 quality management system, covering design, manufacture and final inspection, ensuring consistent high quality at all times.

In line with policy to continually develop and improve its products, Moffat Limited reserves the right to change specifications and design without notice.



© Copyright Moffat Ltd  
UK.C.01.19 / 1622

an Ali Group Company



The Spirit of Excellence