

YOUR STYLE, YOUR WAY



CN4

450mm Single Pan Gas Noodle Cooker



- High performance single pan noodle cooker
- Patented infra-red burner system
- Easy clean 316 grade stainless steel open pan
- 40L water capacity
- Integrated water fill and starch skimming water faucet
- · Five stainless steel noodle baskets supplied
- Hinged basket drain stand
- Safety cut-out thermostat for empty pan/water boil out
- Stainless steel exterior
- Easy clean
- Easy service
- Fully modular

OVERALL CONSTRUCTION

- Pan 1.5mm 316 stainless steel
- Stainless steel front, sides and splashback
- Vitreous enamelled control panel
- Double skin door with stainless exterior
- 25mm (1") skimming overflow and pan drain valve
- 63mm dia. stainless steel adjustable legs to front and two rollers at rear
- Five 304 stainless steel baskets
- 304 stainless steel wire basket support grid in pan

CONTROLS

- Large easy to use knob heat resistant reinforced
- Variable high boil to standby simmer burner control
- Fine adjustment water faucet for pan filling and water refreshing/starch skimming
- Pan protection safety cut-out thermostat
- Millivolt gas valve system (no electrical supply)
- Flame failure protection on pilot
- Piezo ignition to standing pilot burner

CLEANING AND SERVICING

- Open stainless steel pan for easy clean
- Hinged basket drain tray
- Removable basket support grid
- 25mm (1") drain valve for effective draining
- Easy clean stainless steel exterior
- Access to all parts from front of unit

Matching Products CR9D CR6C CF2 CT9 C6D C450 CT6 CS9/C900-S C6B C300








CN4

450mm Single Pan Gas Noodle Cooker

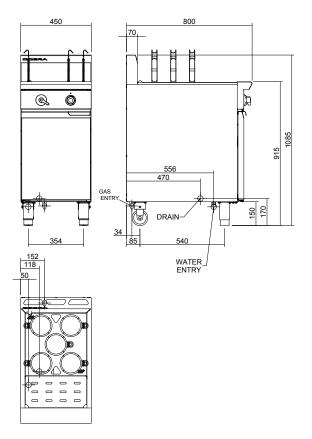

CN4

SPECIFICATIONS

Pan size Water capacity 40L Width 365mm Length 405mm Basket immersion depth 130mm Baskets

5 stainless steel baskets dia 140mm x 150mm deep Stainless steel basket support tray

Burners 1 x infra-red burner

Gas power Natural gas 12.0kW (nett), 45,450 Btu/hr (aross) Propane gas 12.5kW (nett), 46,350 Btu/hr (aross)

Gas flow rate Natural gas 1.27m3/hr Propane gas 0.97kg/hr

Gas connection R 3/4 (BSP) male 50mm from left hand side, 34mm from rear and 140mm from floor

Water connection Cold water connection 50mm from left hand side, 556mm from rear and 140mm from floor R1/2 (BSP) male

Drain connection Drain must be connected to system suitable for boiling water discharge 1" BSP Male connection 118mm from left hand side, 470mm from rear, and 170mm from floor

Dimensions Width 450mm Depth 800mm Height 915mm Incl. splashback 1085mm Nett weight 78kg

Packing data 0.587m3, 95.5kg Width 900mm Depth 520mm Height 1255mm

Gas types Available in Natural gas and LP gas, please specify when orderina Other gas types on request

Options Side splash guards Joining caps

blue-seal.co.uk

United Kingdom blue-seal.co.uk

Blue Seal Limited

Unit 67 Gravelly Business Park Gravelly Birmingham B24 8TQ England Telephone 0121-327 5575 Facsimile 0121-327 9711 sales@blue-seal.co.uk

Australia moffat.com.au Moffat Pty Limited

740 Springvale Road Mulgrave, Victoria 3170 Telephone +613-9518 3888 Facsimile +613-9518 3833 vsales@moffat.com.au

New Zealand moffat.co.nz

Moffat Limited

Rolleston 45 Illinois Drive Izone Business Hub Rolleston 7675 Telephone +64 3-983 6600 Facsimile +64 3-983 6660 sales@moffat.co.nz



ISO9001 Quality Management

Designed and manufactured by

MOFFRT®

All Cobra products are designed and manufactured by Moffat using the internationally recognised ISO9001 quality management system, covering design, manufacture and final inspection, ensuring consistent high quality at all times.

In line with policy to continually develop and improve its products, Moffat Limited reserves the right to change specifications and design without notice.



© Copyright Moffat Ltd UK.C.01.19 / 1622

an Ali Group Company

