

Technical data sheet for

## E32T4 ON THE SK32 STAND

Full Size Electric Convection Oven

TOUCH SCREEN CONTROL on a Stainless Steel Stand



E32T4 OVEN



### E32T4

Unit shall be a Blue Seal electrically heated Turbofan convection oven. The oven shall have a one piece vitreous enamel oven chamber, stainless top and sides and safe touch vented easy clean side hinged door that offers field reversible hinging. Oven shall have capacity for four full size sheet pans. The oven shall have selectable moisture level injection and a 2 speed oven fan. The oven shall be controlled by a 5.7" Touch Screen control with manual and recipe operating modes with icon driven recipe programs and individual shelf control operation mode and multiple stage cooking. Oven controller shall have USB port for recipe file uploading and downloading. A core temperature probe M236060 is optional. The unit shall include dual halogen oven lamps. Oven shall be able to be bench mounted on 76mm feet or mounted on oven stand model SK32. Unit shall be supplied in 100% recyclable shipping packaging. This unit shall be Energy Star certified.

### SK32

Unit shall be a Blue Seal Turbofan stainless steel oven stand. The stand shall be constructed from stainless steel tube with castors, with front castors having dual swivel and wheel locks. It shall be fitted with 6 tray runners suitable for up to 12 half size sheet pans or 6 full size sheet pans. The stand shall be fully compatible with, and support, Turbofan Convection Oven models E32D and G32D. Unit shall be supplied in 100% recyclable shipping packaging.

### STANDARD FEATURES

- 4 18" x 26" / 460 x 660 full size sheet pan capacity
- 4 600 x 400 tray capacity
- 110mm tray spacing
- Compact 735mm width
- Touch Screen control
- Program and manual modes
- Icon driven program menu
- Multiple stage cooking
- Individual shelf control and shelf timers
- Auto-Start mode
- Energy Save Set-Back mode
- Straight or Flex cooking time
- Core probe cooking (optional Core probe Kit)
- USB port for program/icon updating
- Moisture injection mode (5 levels)
- 2 speed bi-directional reversing fan system
- 6.3kW heating power
- Safe-Touch vented side hinged door (standard LH hinge). Optional RH hinge (field convertible)
- Stay-Cool door handle
- Vitreous enamel oven chamber
- Push fit continuous oven door seal (no tools)
- Dual halogen oven lamps
- Anti-skid 50mm dia. 76mm high adjustable stainless steel feet
- 4 oven wire racks supplied
- 100% recyclable packaging

### ACCESSORIES

- Optional M236060 Core Temperature Probe Kit
- Turbofan SK32 Oven Stand
- DSK32 Double Stacking Kit

### E32T4 Full Size Convection Oven TOUCH SCREEN CONTROL

#### CONSTRUCTION

Vitreous enamel fully welded oven chamber  
Stainless steel front, sides and top exterior  
Stainless steel oven fan baffle and oven vent  
Removable 4 position stainless steel side racks  
Oven racks chrome plated wire (4 supplied)  
Stainless steel frame side hinged door  
5mm thick door outer glass  
5mm thick low energy loss door inner glass  
Full stainless steel welded door handle  
Stainless steel control panel  
Aluminised coated steel base and rear panels

#### CONTROLS

5.7" LED backlit touch screen  
Icon driven program menu  
BMP image icon imports via USB port  
Program updates via USB port  
Temperature range 30 - 260°C  
Adjustable sounder tones and volume  
Other specification on request  
Safety thermostat cut-out  
Optional core temp probe

#### CLEANING

Stainless steel top and side exterior panels  
Vitreous enamel oven chamber  
Fully removable stainless steel oven side racks  
Removable stainless steel oven fan baffle  
Easy clean door system with hinge out door inner glass (no tools required)  
Removable plug-in oven door seal (no tools required)

#### SPECIFICATIONS

##### Electrical Requirements

230-240V, 50Hz, 1P+N+E, 6.5kW, 27A  
No cordset supplied

##### Water Requirements (optional)

Cold water connection 3/4" BSP male  
80psi maximum inlet pressure / 20psi minimum inlet pressure

##### External Dimensions

Width 735mm  
Height 730mm including 76mm feet  
Depth 810mm

##### Oven Internal Dimensions

Width 465mm  
Height 515mm  
Depth 700mm  
Volume 0.17m<sup>3</sup>

##### Oven Rack Dimensions

Width 460mm  
Depth 660mm

Nett Weight (E32T4)  
89kg

##### Packing Data (E32T4)

105kg  
0.57m<sup>3</sup>  
Width 760mm  
Height 815mm  
Depth 925mm

### SK32 Stainless Steel Stand

All stainless steel welded frame oven stand for Turbofan E32D, E32T and G32D Series ovens  
6 position tray runners standard  
76mm diameter wheel swivel castors standard with 2 front castors with dual swivel and wheel  
Welded 38mm and 32mm square tube front and rear frames  
Welded rack supports/side frames  
4 dia. 76mm swivel castors with 2 front castors dual wheel and swivel lock  
Top frame oven supports suit Turbofan E32D, E32T and G32D Series oven mounting  
Supplied CKD for assembly on site

##### External Dimensions (SK32 Oven Stand)

Width 735mm  
Height 880mm  
Depth 650mm

##### Nett Weight (SK32 Oven Stand)

18.5kg

##### Packing Data (SK32 Oven Stand)

23kg  
0.1m<sup>3</sup>  
Width 830mm  
Height 900mm  
Depth 152mm

##### INSTALLATION CLEARANCES

Rear 50mm  
LH Side 50mm  
RH Side\* 75mm  
\* For fixed installations a minimum of 500mm is required for service

##### CLEARANCE FROM SOURCES OF HEAT

A minimum distance of 300mm from the appliance sides is required



blue-seal.co.uk  
turbofanoven.com

United Kingdom  
Blue Seal Limited


Unit 67  
Gravelly Business Park  
Gravelly  
Birmingham B24 8TQ  
England  
Telephone 0121-327 5575  
Facsimile 0121-327 9711  
sales@blue-seal.co.uk  
www.blue-seal.co.uk

Australia  
Moffat Pty Limited

740 Springvale Road  
Mulgrave, Victoria 3170  
Australia  
Telephone 03-9518 3888  
Facsimile 03-9518 3833  
vsales@moffat.com.au  
www.moffat.com.au

New Zealand  
Moffat Limited

Christchurch  
45 Illinois Drive  
Izone Business Hub  
Rolleston 7675  
Telephone +64 3-983 6600  
Facsimile +64 3-983 6660  
sales@moffat.co.nz  
www.moffat.co.nz

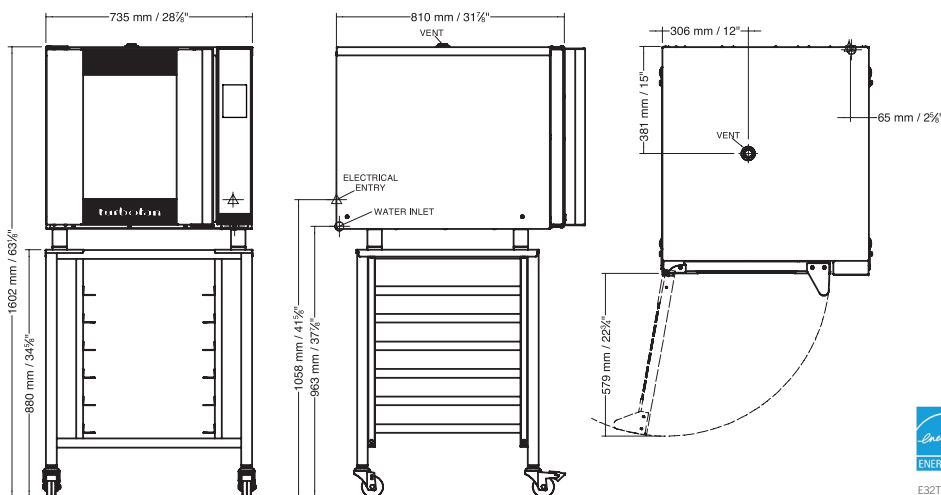

E32T4 OVEN



ISO9001  
Quality  
Management  
Standard

Designed and manufactured by



ISO9001

All Turbofan products are designed and manufactured by Moffat using the internationally recognised ISO9001 quality management system, covering design, manufacture and final inspection, ensuring consistent high quality at all times.

In line with policy to continually develop and improve its products, Moffat Limited reserves the right to change specifications and design without notice.



© Copyright Moffat Ltd  
UK.TFN.S.1601

