



GS6C/T - Lincat Silverlink 600 Electric Counter-top Griddle - Chrome Plate - Twin Zone - W 600 mm - 4.0 kW

Whether you're cooking eggs, bacon, burgers or vegetables, the versatile Silverlink 600 Electric Griddle won't let you down.

- ✔ Two separately controlled heat zones give you the option of operating either zone independently to provide a smaller cooking area during quiet periods as well as offering versatility when cooking two separate meals simultaneously
- ✔ Chrome surface heats up quicker than standard griddles with less energy loss as well as reduced energy radiation, keeping the kitchen cooler for staff and reducing pressure on the ventilation system
- ✔ Transfers heat to food more efficiently than a standard griddle
- ✔ Thermostatically controlled to give accurate temperatures during the cooking process for consistent results
- ✔ Removable front drainer drawer which also makes for easy cleaning. Ideal for busy establishments
- ✔ The plate is fully welded into the frame to prevent leaks and places where food and carbon can build up

Specifications

Summary Power and Performance

<p>Brand Lincat</p> <p>Range Silverlink 600</p> <p>Power Type Electric</p> <p>Unit Type Counter-top</p> <p>Available in UK Only No</p> <p>UK Warranty 2 Years Parts and Labour Warranty</p> <p>Export Warranty Contact your local dealer</p> <p>GTIN 5056105104889</p>	<p>Total Power kW 4.0</p> <p>Temperature Range °C 50-250</p> <p>IP Rating IP23</p> <p>Cooking Area (Width x Depth) mm 562 x 405</p> <p>Temperature Control Mechanical</p>
--	--

Key Specifications

Number of Heat Zones	2
Grill Plate Surface Type	Smooth
Grill Plate Material	Chrome

Weights and Dimensions Supply Connections

<p>Unit Height (External) mm 330</p> <p>Unit Width (External) mm 600</p> <p>Unit Depth (External) mm 620</p> <p>Net Weight Kg 41</p>	<p>Requires Installation Yes</p> <p>Requires Electrical Supply Yes</p> <p>UK 3 Pin Plug No</p> <p>Requires Hardwiring Yes</p> <p>Electrical Supply Rating Watts 4,000</p> <p>Single Phase Amps 17.4</p> <p>Single Phase Voltage 230</p> <p>Three Phase Amps L1=8.7; L2=8.7; L3=N/A</p> <p>Three Phase Voltage 400</p>
--	--




Shipping

Packed Weight Kg	45.1
Packed Height cm	63.5
Packed Width cm	70
Packed Depth cm	70

Available Accessories

CC6	Lincat Silverlink 600 Free-standing Ambient Open-Top Pedestal with Doors - W 600 mm
CN6	Lincat Silverlink 600 Free-standing Ambient Open-Top Pedestal without Doors - W 600 mm
HC6	Lincat Silverlink 600 Free-standing Heated Open-Top Pedestal with Doors - W 600 mm - 0.5 kW
HCL6	Lincat Silverlink 600 Free-standing Heated Pedestal with Legs and Doors - W 600 mm - 0.5 kW
SB6	600 GRIDDLE SPLASHB
SLS6	Lincat Silverlink 600 Free-standing Floor Stand - for units W 600 mm

Technical Picture

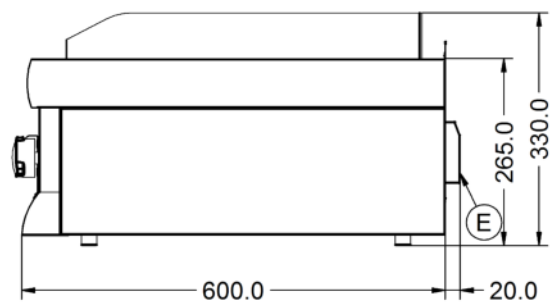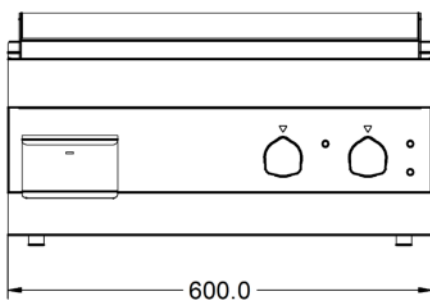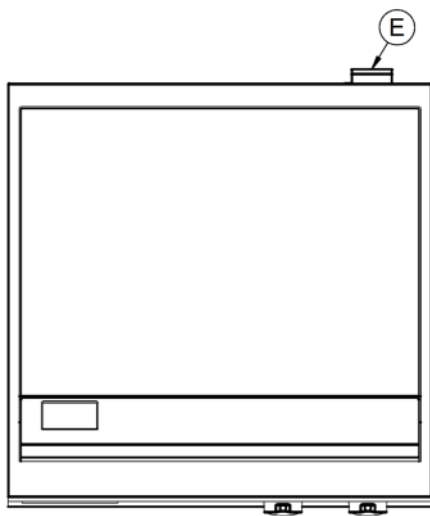



Lincat Limited

Whisby Road,
Lincoln, LN6 3QZ,
United Kingdom

Company No: 2175448

A member company of



Customer Care

Tel: +44 1522 875500
Email: care@lincat.co.uk

Export Customers

Tel: +44 1522 875536
Email: export@lincat.co.uk

Opening Hours

Monday – Friday:
8.30am – 5pm