



## GS6/TR/E - Lincat Silverlink 600 Electric Counter-top Griddle - Twin Zone - Half-Ribbed Plate - Extra Power - W 600 mm - 5.6 kW

Whether you're cooking eggs, bacon, burgers or vegetables, the versatile Silverlink 600 Electric Griddle won't let you down.

- ✓ Extra powered element for maximum output for a busy kitchen
- ✓ Flexibility of a half smooth, half ribbed plate to give attractive branding lines to your food whilst being able to cook eggs on the smooth half of the plate
- ✓ Two separately controlled heat zones give you the option of operating either zone independently to provide a smaller cooking area during quiet periods as well as offering versatility when cooking two separate meals simultaneously
- ✓ Hard wearing 12 mm thick machined steel plate providing even heat distribution and excellent heat retention
- ✓ Drip draw to collect all the cooking liquids to reduce cleaning times
- ✓ Removable front drainer drawer which also makes for easy cleaning. Ideal for busy establishments
- ✓ The plate is fully welded into the frame to prevent leaks and places where food and carbon can build up

### Specifications

Summary		Power and Performance	
<b>Brand</b>	Lincat	<b>Total Power kW</b>	5.6
<b>Range</b>	Silverlink 600	<b>Temperature Range °C</b>	50-250
<b>Power Type</b>	Electric	<b>IP Rating</b>	IP33
<b>Unit Type</b>	Counter-top	<b>Cooking Area (Width x Depth) mm</b>	562 x 405
<b>Available in UK Only</b>	No	<b>Temperature Control</b>	Mechanical
<b>UK Warranty</b>	2 Years Parts and Labour Warranty		
<b>Export Warranty</b>	Contact your local dealer		
<b>GTIN</b>	5056105104865		

### Key Specifications

<b>Number of Heat Zones</b>	2
<b>Grill Plate Surface Type</b>	Half-ribbed
<b>Grill Plate Material</b>	Steel

Weights and Dimensions		Supply Connections	
<b>Unit Height (External) mm</b>	330	<b>Requires Installation</b>	Yes
<b>Unit Width (External) mm</b>	600	<b>Requires Electrical Supply</b>	Yes
<b>Unit Depth (External) mm</b>	620	<b>UK 3 Pin Plug</b>	No
<b>Net Weight Kg</b>	40	<b>Requires Hardwiring</b>	Yes
		<b>Electrical Supply Rating Watts</b>	5,600
		<b>Single Phase Amps</b>	24.3
		<b>Single Phase Voltage</b>	230
		<b>Three Phase Amps</b>	L1=12.2; L2=12.2; L3=N/A
		<b>Three Phase Voltage</b>	400




## Shipping

Packed Weight Kg	44
Packed Height cm	63.5
Packed Width cm	70
Packed Depth cm	70

## Available Accessories

<b>CC6</b>	Lincat Silverlink 600 Free-standing Ambient Open-Top Pedestal with Doors - W 600 mm
<b>CN6</b>	Lincat Silverlink 600 Free-standing Ambient Open-Top Pedestal without Doors - W 600 mm
<b>HC6</b>	Lincat Silverlink 600 Free-standing Heated Open-Top Pedestal with Doors - W 600 mm - 0.5 kW
<b>HCL6</b>	Lincat Silverlink 600 Free-standing Heated Pedestal with Legs and Doors - W 600 mm - 0.5 kW
<b>SB6</b>	600 GRIDDLE SPLASHB
<b>SLS6</b>	Lincat Silverlink 600 Free-standing Floor Stand - for units W 600 mm

## Technical Picture

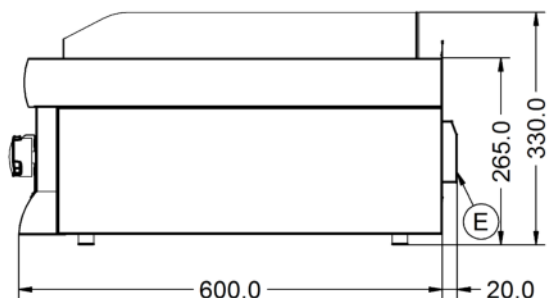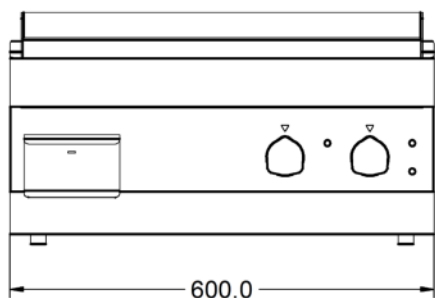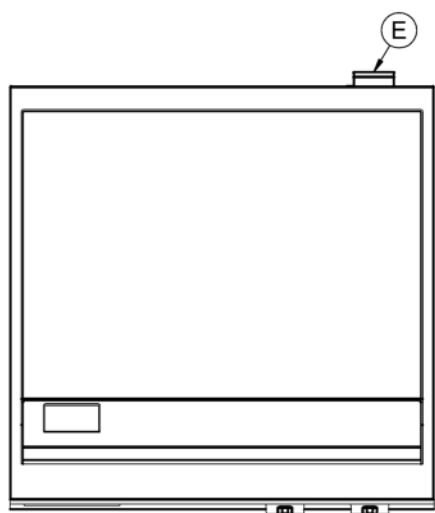



**Lincat Limited**

Whisby Road,  
Lincoln, LN6 3QZ,  
United Kingdom

**Company No:** 2175448

A member company of



**Customer Care**

**Tel:** +44 1522 875500  
**Email:** care@lincat.co.uk

**Export Customers**

**Tel:** +44 1522 875536  
**Email:** export@lincat.co.uk

**Opening Hours**

**Monday – Friday:**  
8.30am – 5pm