
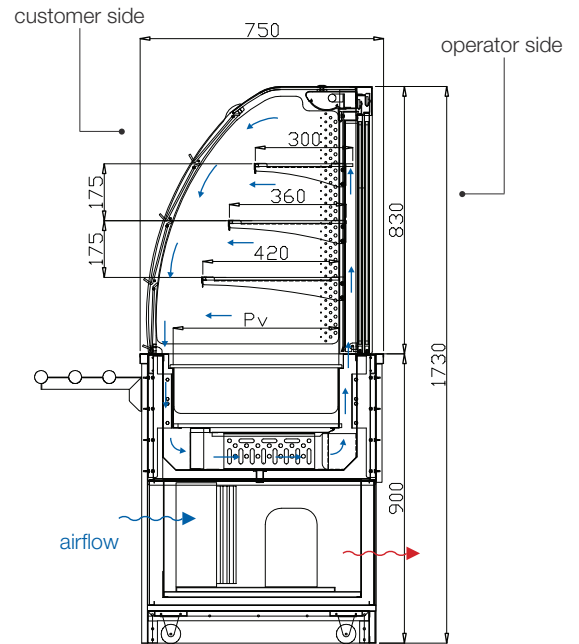


Refrigerated and ventilated display case on refrigerated tank - 3 shelves, curved

- ▶ Stainless steel top H 30 mm in AISI 304, th. 12/10 with straight edges
- ▶ Refrigerated laminar airflow in the tank and on all shelves
- ▶ Stainless steel height-adjustable blind bottoms (useful height 30-150 mm)
- ▶ Evaporator with anti-corrosion coating, which can be lifted to easily clean the well
- ▶ Insulation by high density expanded polyurethane without C.F.C. and H.C.F.C.
- ▶ With condensing unit or pre-set for remote refrigeration
- ▶ Automatic condensed water evaporation
- ▶ Digital control system for temperature adjustment and defrosting
- ▶ Counter in laminated wood, on wheels
- ▶ LED lighting on the ceiling
- ▶ Sliding doors on operator side to easily refill the display

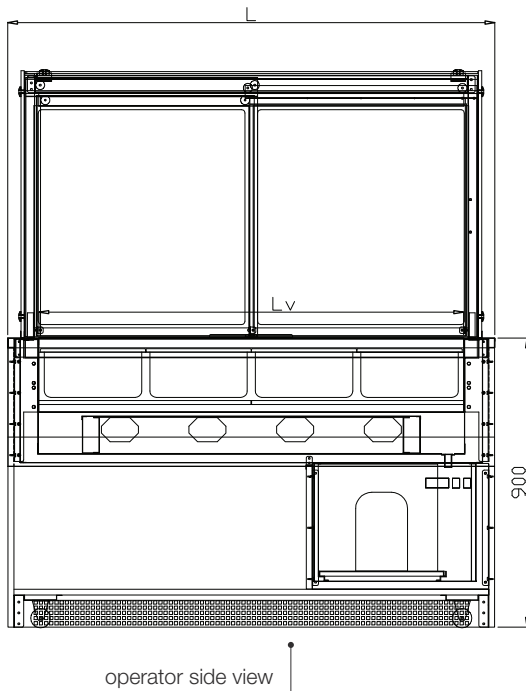

| | 2 GN1/1 | 3 GN1/1 | 4 GN1/1 | 5 GN1/1 |
|---------------------------------------|----------------|----------------|-----------------|-----------------|
| External dimensions [mm] LxPxH | 845x750x1730 | 1170x750x1730 | 1500x750x1730 | 1825x750x1730 |
| Well dimensions [mm] LvxPxHv | 650x510x30/150 | 980x510x30/150 | 1310x510x30/150 | 1630x510x30/150 |
| Capacity GN 1/1 containers | 2 GN1/1 | 3 GN1/1 | 4 GN1/1 | 5 GN1/1 |
| Temperature [°C] closed, w/flaps | -1/+5* | -1/+5* | -1/+5* | -1/+5* |
| Temperature [°C] w/curtain | -1/+7** | -1/+7** | -1/+7** | -1/+7** |
| Refrigerant gas | R404A | R404A | R404A | R404A |
| Cooling power at -10°C [W] | 750 | 980 | 1150 | 1650 |
| Total power [Kw] | 0,8 | 1 | 1,1 | 1,3 |
| Supply voltage (50Hz) | 230V 1F+N | 230V 1F+N | 230V 1F+N | 230V 1F+N |

* Classification 2M1 according to UNI EN ISO 23953-1:2006, UNI EN ISO 23953-2:2006
 ** Classification 2M2 according to UNI EN ISO 23953-1:2006, UNI EN ISO 23953-2:2006