



# Product Code: EP700SH 41-761

## Single door refrigerator short cabinet

---



The third generation of the EcoPro, the G3 cabinets are loaded with reliability, energy-saving, food safety and hygiene features.

### Features & Benefits

---

- All the benefits of the standard G3, but this product can fit through a standard (1960 x 760) doorway without tilting
- Suitable for low ceiling height applications
- Foster Shield provides advanced temperature control and hygienic design, protecting from the dangers of unsafe food storage. With air distribution optimised by CFD design technology, efficient operation is assured, even when shelves are fully loaded
- With PureControl, the G3's controller display uses pure LEDs, incorporating InGaN technology, which means it achieves higher resolution, lasts longer - all while using less power. Through the simple addition of a gateway, you're connectivity-ready
- Fitted with our new and improved +stayclear condenser which helps increase product life and reduce energy consumption, +stayclear helps your low energy fridge stay a low energy fridge. Now fitted across the cabinet and counter range as standard
- Market leading usable capacity, now supplied with 4 shelves as standard making your money go further – holds more than a conventional fridge
- Fully GN 2/1 shelving compatible
- Operates efficiently in ambient temperatures of up to 43°C

## Shelving

<b>Extra heavy duty shelving</b>	Option
<b>4 shelves (GN2/1)</b>	Standard

## Electrical & Service Data

<b>230/50/1</b>	Standard
<b>Fuse Required (A)</b>	10

## Finish

<b>s/steel ext, 304 s/s door &amp; alu int</b>	Standard
--	----------

## Base Fittings

<b>Castors 80mm</b>	Standard
<b>Legs 150mm</b>	Option

## Product Extras

<b>Helicoil Mains Lead</b>	Option
----------------------------	--------

## Energy

<b>AEC</b>	320
<b>Nett Volume</b>	440
<b>Energy Grade</b>	A
<b>Energy Efficiency Index</b>	24.01

## Refrigeration

<b>R290 - Energy Efficient</b>	Standard
<b>Integral Refrigeration System</b>	Standard
<b>Less Condensing Unit</b>	Option


## Specification

<b>Gross volume (Itrs)</b>	550
<b>Refrigerator +1/+4°C</b>	Standard
<b>Width (mm)</b>	700
<b>Depth (mm)</b>	855
<b>Height (mm)</b>	1955

## Footnotes

- Requires 100mm free space above product
- Depth with door open is 1500mm

# Energy Performance Data and information

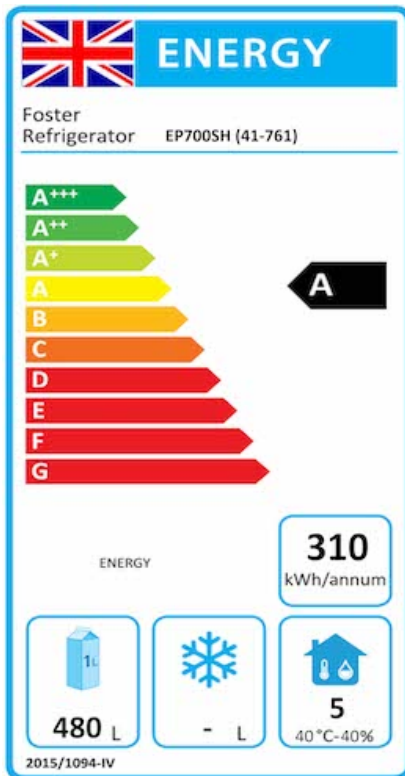

## Application


This appliance is intended for use in ambient temperatures up to 40°C

## Safety

Precautionary instructions and maintenance advice, to ensure efficient operation, can be found in this products operating instructions.

## Recycling

For recycling and end of life care for this product, please refer to environmental section of the website or visit [our policies](#)

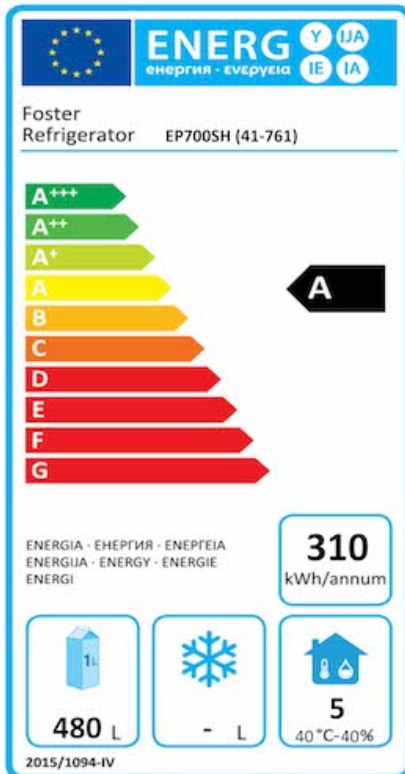

The Refrigeration Experts

Foster Refrigerator, Oldmedow Road, King's Lynn, Norfolk, PE30 4JU  
+44 (0)1553 691122 | [sales@foster-gamko.com](mailto:sales@foster-gamko.com) | [www.fosterrefrigerator.com](http://www.fosterrefrigerator.com)

All images shown are for illustration purpose only. All images and photographs are not intended to be relied upon for, nor to form part of, any contract unless specifically incorporated in writing into the contract. Solely the dimensions and specifications incorporated in the quotation or purchase order confirmation shall be contractually binding.