



GENERAL FEATURES

- Rack size 55x55 cm
- Gross weight: 105 Kg
- Washing cycle/racks/hour: 2'-4'-6'/ 30-15-10
- Lower and upper wash/rinse arms
- Wash pump: 800 W
- Boiler capacity: 7 litri
- Tank capacity: 50 litri
- Boiler heating element: 6 Kw
- Tank heating element: 6 Kw
- Water quantity per cycle: 3 litri
- Electronic controls LCD display
- Useful washing height: 450 mm
- Magnetic door microswitch
- Automatic water filling
- Double electric detergent and rinse dispenser
- Hot rinse
- Thermostop function
- Anti back-flow valve
- Green Functom for energy saving
- Automatic end-of-day self cleaning of water
- Washing pump with Soft-start

FILTRATION

- Removable plastic pump filter in several sections
- Stainless steel surface filters

BODY

- AISI 304 stainless steel Body
- Double skinned insulated body
- Performed rack guides
- Performed wash tank
- Stainless steel door handle
- Opening / closing of the amortized door by means of springs
- Stainless steel wash/rinse arms easily removable
- Boiler in AISI 304 stainless steel

EQUIPMENT AS GLASSWASHER

- 1 stainless steel rack 5 trays
- 1 utensil basket 55x55 cm
- 1 inlet hose (length 2 m)
- 1 drain hose (length 2,5 m)

OPTIONAL

- Drain pump
- 60 Hz version
- Hot water filling

ACCESSORIES

- Special baskets

INSTALLATION

- Use the screws of the feet and a spirit level to ensure that the machine is levelled

MAIN POWER SUPPLY

- The voltage of main power supply must be compatible with the rated voltage
- The machine must be connected to a suitable earth (ground) system
- Connect the machine power socket to the multipole wall switch provided



WATER SUPPLY CONNECTION

- A water softener must be installed if the water is hard
- The water pressure must be between 0.2MPa (2 bar), and, 0.5MPa (5 bar)
- The temperature of the water-supply must be between 10°C to 50°C

TECHNICAL SPECIFICATIONS

- Voltage: **380-415V3N / 220-240V3 / 220-240 V**
~50Hz
- Total power: **6.8 kW**
- Amperage: **10 A / 17 A / 30 A**
- Power cord supply size: **5 x 2.5 mmq / 3 x 4 mmq**


AU-L 55.45^E BP

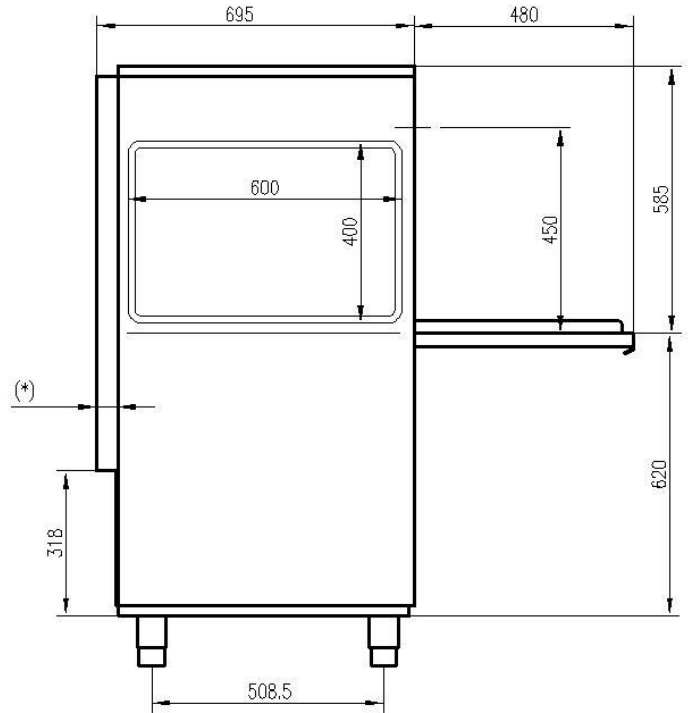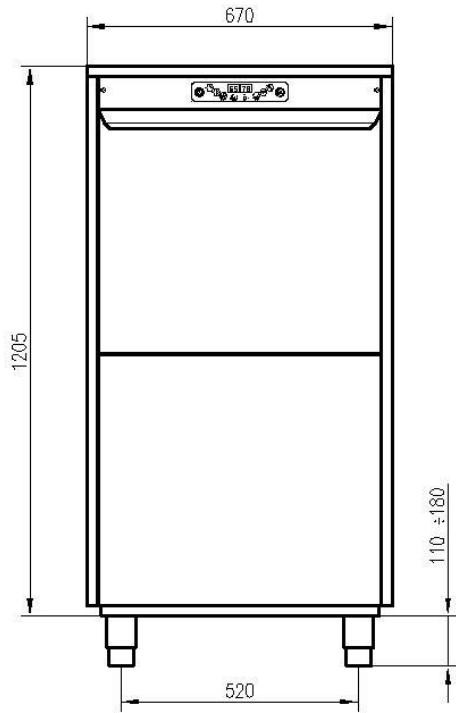

(*)= VANO DI PASSAGGIO TUBI DI CARICO E SCARICO ACQUA
FILO EQUIPOTENZIALE

(*)= PASSAGE FOR WATER OUTLET AND INLET PIPE AND
UNIPOTENTIAL WIRE

(*)= OUVERTURE DE PASSAGE TUYAUX DE VIDANGE, ALIMENTATION EAU
ET CONNEXION EQUIPOTENTIELLE.

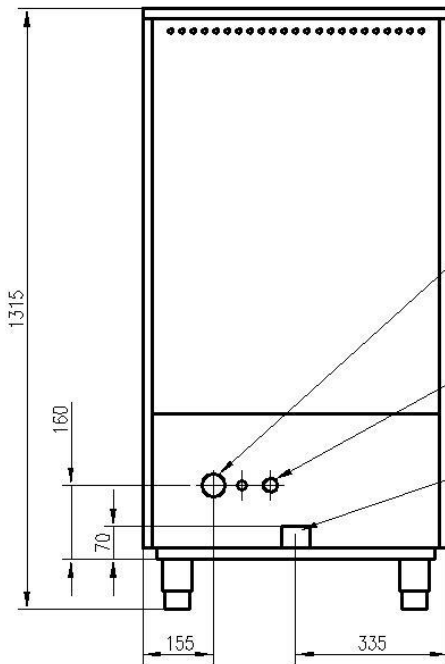

TUBO DI SCARICO Ø INT. mm.28 LUNGHEZZA mm. 2000
EXIT WATER OUTLET PIPE INT. Ø 28 mm. L=mm. 2000.
TUYAU DE VIDANGE Ø INT. 28 mm. L=mm. 2000.

USCITA CAVO DI ALIMENTAZIONE
EXIT POWER CORD SUPPLY
OUVERTURE DE PASSAGE CABLE D'ALIMENTATION

CANNA DI CARICO CON ATTACCO G 3/4" LUNGHEZZA mm. 2000.
WATER INLET PIPE CONNECTION G 3/4" L=mm 2000.
TUYAU D'ALIMENTATION EAU AVEC CONNEXION G 3/4" L=mm 2000.

VISTA POSTERIORE
REAR OF MACHINE
VUE ARRIERE

	Min 10°C-MAX 50°C
	Min 10°C-MAX 25°C with ENERGY RECOVERY
	200÷500kPa(2÷5 Bar)
	100÷500kPa(1÷5 Bar) with ATMOSPHERIC BOILER
	HARDNESS 5±20f-2.8±11'd