

MODEL S60/S60A

SOFT SERVE FREEZER

TWIN TWIST, FREE STANDING, DIGITAL CONTROL



Ideal for **ultra high footfall outlets** to soft serve ice cream, frozen yogurt, gelato or sorbet. Fully loaded with all standard options.



FAST FREEZE DOWN

Patented high efficiency heat exchanger allows fast freeze down with low energy consumption



DIGITAL CONTROL AND DISPLAY

Digital control provides access to system settings and displays critical system information



AUTO PROGRAMMING

Allows automatic switching of operation modes based on preset schedules



STANDBY

Maintains product temperature in both mix hopper and freezing cylinder below 4.4°C (40°F) overnight



HOPPER AGITATOR

Maintain product consistency and prevent product separation



SOFT SYSTEM START

Slow motor start reduces equipment noise and stress on drive train



DIRECT DRIVE TRANSMISSION

Eliminates consumable moving parts and increases transmission efficiency



SAFETY PROTECTIONS

- Low temperature and motor overload shut-offs to protect in the event of cylinder freeze up
- High pressure switch to prevent compressor overheating



DEFROST FOR CLEANING



Increases efficiency during cleaning by heating frozen product in cylinder. Automatically prevents product overflow after dispense.

POWERFUL AND VERSATILE TWIN TWIST ULTRA HIGH FREE STANDING MODEL FOR ICE CREAM, FROZEN YOGURT, SORBET AND MUCH MORE

MAXIMISE YOUR PROFITS

MODEL S60/S60A

SOFT SERVE FREEZER MACHINE

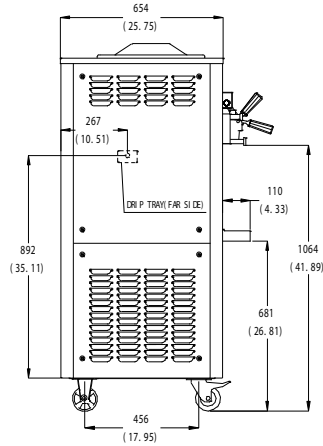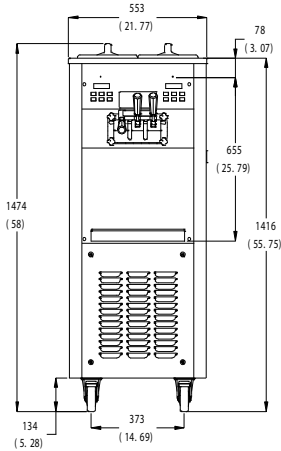

ISO 9001 REGISTERED

SPECIFICATIONS

Flavours	2 + Twist	
Freezing Cylinders	2 x 1.7L / 1.8qt	
Mix Hoppers	2 x 12L (10L for A)	
Output Capacity (80 grams)	450 serves/hr	
Clearance Requirements	152mm/6" on back	

WEIGHT	KG/LB (Gravity)	KG/LB (Pump)
Net	210 / 467	220 / 489
Shipping	230 / 511	240 / 533
Volume	0.90 CBM / 2 8.85 CBF	

DIMENSIONS	NET (MM/IN)	SHIPPING (MM/IN)
Width	532 / 20.9	660 / 23.6
Depth	766 / 30.2	830 / 32.7
Height	1474 / 58.0	1640 / 64.6

ELECTRICAL	AMP	VOLT	POWER(KW)
Single Phase	20	NA	NA
Single Phase	20	NA	NA

FEATURES

CONTROL SYSTEMS	TWO, DIGITAL
REFRIGERATED HOPPERS	<input checked="" type="checkbox"/>
HOPPER AGITATOR, OPTIONAL	<input checked="" type="checkbox"/>
TEMPERATURE DISPLAY	<input checked="" type="checkbox"/>
STANDBY MODE	<input checked="" type="checkbox"/>
AUTO CLOSING DISPENSING VALVES	<input checked="" type="checkbox"/>
DISPENSING SPEED CONTROL	<input checked="" type="checkbox"/>
LOW MIX INDICATOR LIGHT & ALARM	<input checked="" type="checkbox"/>
LOW TEMPERATURE PROTECTION	<input checked="" type="checkbox"/>
MOTOR OVERLOAD PROTECTION	<input checked="" type="checkbox"/>
HIGH PRESSURE PROTECTION	<input checked="" type="checkbox"/>
DEFROST & QUICK REFREEZE	<input checked="" type="checkbox"/>
SOFT START	<input checked="" type="checkbox"/>
DIRECT DRIVE PUMP (A ONLY)	<input checked="" type="checkbox"/>
S60A: PUMP FEED MODEL, AVAILABLE	<input checked="" type="checkbox"/>
AIR PUMP OPTION, AVAILABLE	<input checked="" type="checkbox"/>
INVERTER SYSTEM	<input checked="" type="checkbox"/>