

MODEL S70/S70C

SOFT SERVE FREEZER

TWIN TWIST, FREE STANDING, DIGITAL CONTROL



Ideal for **extremely high capacity outlets** to serve ice cream, frozen yogurt or sorbet. Small footprint helps save floor space.



FAST FREEZE DOWN

Patented high efficiency heat exchanger allows fast freeze down with low energy consumption



DIGITAL CONTROL AND DISPLAY

Digital control provides access to system settings and displays critical system information



AUTO PROGRAMMING

Allows automatic switching of operation modes based on preset schedules



STANDBY

Maintains product temperature in both mix hopper and freezing cylinder below 4.4°C (40°F) overnight



HOPPER AGITATOR

Maintain product consistency and prevent product separation



SOFT SYSTEM START

Slow motor start reduces equipment noise and stress on drive train



DIRECT DRIVE TRANSMISSION

Eliminates consumable moving parts and increases transmission efficiency



SAFETY PROTECTIONS

- Low temperature and motor overload shutoffs to protect in the event of cylinder freeze up
- High pressure switch to prevent compressor overheating



DEFROST FOR CLEANING



Increases efficiency during cleaning by heating frozen product in cylinder. Automatically prevents product overflow after dispense.

MOST POWERFUL AND VERSATILE TWIN TWIST, EXTREMELY HIGH CAPACITY FREESTANDING FOR ICE CREAM, FROZEN YOGURT, SORBET AND MUCH MORE

MAXIMISE YOUR PROFITS

MODEL S70/S70C

SOFT SERVE FREEZER MACHINE

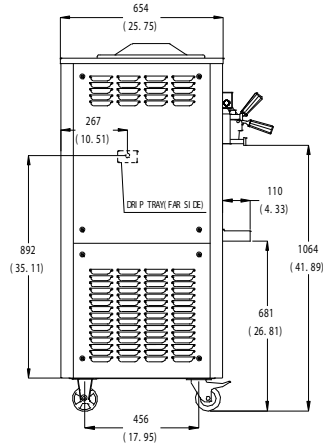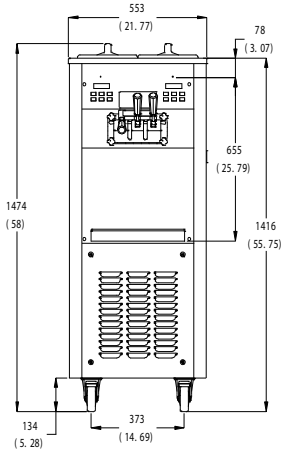

ISO 9001 REGISTERED

SPECIFICATIONS

Flavours	2 + Twist	
Freezing Cylinders	2 x 3.2L / 3.4qt	
Mix Hoppers	2 x 15L (10L for A)	
Output Capacity (80 grams)	720 serves/hr	
Clearance Requirements	152mm/6" on back	

WEIGHT	KG/LB (Gravity)	KG/LB (Pump)
Net	253 / 562	263 / 585
Shipping	273 / 607	283 / 629
Volume	0.90 CBM / 3 8.62 CBF	

DIMENSIONS	NET (MM/IN)	SHIPPING (MM/IN)
Width	532 / 20.9	710 / 28.0
Depth	823 / 32.4	890 / 35.0
Height	1563 / 61.5	1730 / 68.1

ELECTRICAL

3 phase electrical requirement

FEATURES

CONTROL SYSTEMS	TWO, DIGITAL
REFRIGERATED HOPPERS	<input checked="" type="checkbox"/>
HOPPER AGITATOR	<input checked="" type="checkbox"/>
TEMPERATURE DISPLAY	<input checked="" type="checkbox"/>
STANDBY MODE	<input checked="" type="checkbox"/>
AUTO CLOSING DISPENSING VALVES	<input checked="" type="checkbox"/>
DISPENSING SPEED CONTROL	<input checked="" type="checkbox"/>
LOW MIX INDICATOR LIGHT & ALARM	<input checked="" type="checkbox"/>
LOW TEMPERATURE PROTECTION	<input checked="" type="checkbox"/>
MOTOR OVERLOAD PROTECTION	<input checked="" type="checkbox"/>
HIGH PRESSURE PROTECTION	<input checked="" type="checkbox"/>
DEFROST & QUICK REFREEZE	<input checked="" type="checkbox"/>
SOFT START	<input checked="" type="checkbox"/>
DIRECT DRIVE PUMP (A ONLY)	<input checked="" type="checkbox"/>
S70C - PUMP FEED MODEL AVAILABLE	<input checked="" type="checkbox"/>
AIR PUMP OPTION, AVAILABLE	<input checked="" type="checkbox"/>
S70C - PUMP AND PASTEURISATION AVAILABLE	<input checked="" type="checkbox"/>
S70A - PUMP FED AVAILABLE	<input checked="" type="checkbox"/>
INVERTER SYSTEM	<input checked="" type="checkbox"/>