

# MODEL T10

## SOFT SERVE FREEZER

SINGLE FLAVOR, COUNTERTOP, GRAVITY FEED



Ideal for **medium capacity outlets** to add soft serve ice cream and frozen yogurt. Low profile design keeps operation simple and helps reduce cost of ownership.



### FAST FREEZE DOWN

Patented high efficiency heat exchanger allows fast freeze down with low energy consumption



### DIGITAL CONTROL AND DISPLAY

Microprocessor control provides access to system settings and additional functions. Digital interface displays critical info as system status, temperatures, dispense count, errors, etc.



### LOW MIX INDICATOR

Light turns "ON" at low mix to alert operator to add mix



### SELF CLOSING DISPENSING VALVE

Automatically prevents product overflow after dispense



### DISPENSE SPEED CONTROL

Provides flexibility in dispense rate control for different applications



### STANDBY

Maintains product temperature in both mix hopper and freezing cylinder below 4.4°C (40°F) overnight



### SAFETY PROTECTIONS


- Low temperature and motor overload shut-off to protect in the event of cylinder freeze up
- High pressure switch to prevent compressor overheating
- Thermal overload to protect from motor overheating

**MOST COMPACT AND VERSATILE SINGLE FLAVOUR COUNTERTOP  
MODEL FOR SOFT SERVE ICE CREAM AND FROZEN YOGURT**

# MAXIMISE YOUR PROFITS

# MODEL T10

# SOFT SERVE FREEZER MACHINE

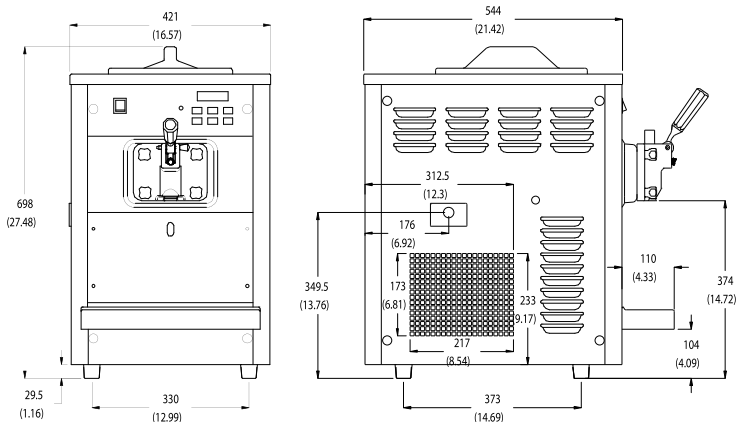

## SPECIFICATIONS

Flavours	1
Freezing Cylinders	1 x 1.7L
Mix Hoppers	1 x 8.0L
Output Capacity (80 grams)	130 serves/hr
Clearance Requirements	152mm/6" on back

WEIGHT	KG/LB (Gravity)	KG/LB (Pump)
Net	80 / 178	NA
Shipping	90 / 200	NA
Volume	0.33 CBM / 11.47 CBF	

DIMENSIONS	NET (MM/IN)	SHIPPING (MM/IN)
Width	421 / 16.6	505 / 19.9
Depth	544 / 21.4	720 / 28.3
Height	714 / 28.1	895 / 35.2

ELECTRICAL	MFS	MCA	POWER(KW)
110-115/60/1	20	16	1.8
220-240/50/1	13	8	1.8
208-230/60/1	20	10	1.8

## FEATURES

CONTROL SYSTEMS	SINGLE DIGITAL
REFRIGERATED HOPPERS	<input checked="" type="checkbox"/>
TEMPERATURE DISPLAY	<input checked="" type="checkbox"/>
STANDBY MODE	<input checked="" type="checkbox"/>
AUTO CLOSING DISPENSING VALVES	<input checked="" type="checkbox"/>
DISPENSING SPEED CONTROL	<input checked="" type="checkbox"/>
LOW MIX INDICATOR LIGHT	<input checked="" type="checkbox"/>
LOW MIX INDICATOR ALARM	<input checked="" type="checkbox"/>
LOW TEMPERATURE PROTECTION	<input checked="" type="checkbox"/>
MOTOR AMPERAGE PROTECTION	<input checked="" type="checkbox"/>
HIGH PRESSURE PROTECTION	<input checked="" type="checkbox"/>
THERMAL OVERLOAD PROTECTION	<input checked="" type="checkbox"/>

## CATERBOSS

Unit 1a, Tullow Industrial Estate, Tullow, Co.Carlow. R93A273 | 01-6875772 | sales@caterboss.ie