

MODEL T29/T29A

SOFT SERVE FREEZER

TWIN TWIST, COUNTERTOP, DIGITAL CONTROL



Ideal for **medium capacity outlets** to add soft serve ice cream and frozen yogurt, innovative design keeps operation simple and helps reduce cost of ownership.



FAST FREEZE DOWN

Patented high efficiency heat exchanger allows fast freeze down with low energy consumption



DIGITAL CONTROL AND DISPLAY

Digital control provides access to system settings and displays critical system information



LOW MIX INDICATOR

Light turns "ON" at low mix to alert operator to add mix



SELF CLOSING DISPENSING VALVE

Automatically prevents product overflow after dispense



DISPENSE SPEED CONTROL

Provides flexibility in dispense rate control for different applications



HOPPER AGITATORS

Maintain product consistency and prevent product separation



AUTO PROGRAMMING

Allows automatic switching of operation modes based on preset schedules



STANDBY

Maintains product temperature in both mix hopper and freezing cylinder below 4.4°C (40°F) overnight



SAFETY PROTECTIONS


- Low temperature and motor overload shut-off to protect in the event of cylinder freeze up
- High pressure switch to prevent compressor overheating
- Thermal overload to protect from motor overheating

SIMPLE BUT POWERFUL CLASSY DESIGN THAT OFFERS QUALITY AND EASE OF USE

MAXIMISE YOUR PROFITS

MODEL T29/T29A

SOFT SERVE FREEZER MACHINE

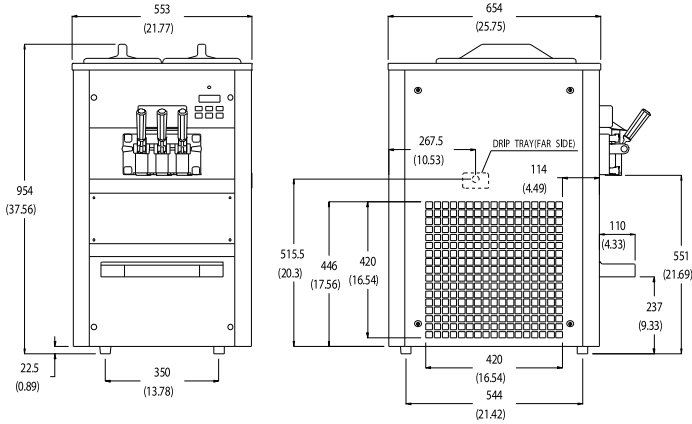

SPECIFICATIONS

Flavours	2 + Twist	
Freezing Cylinders	2 x 1.7L	
Mix Hoppers	2 x 12L	
Output Capacity (80 grams)	300 serves/hr	
Clearance Requirements	152mm/6" on left	

WEIGHT	KG/LB (Gravity)	KG/LB (Pump)
Net	155 / 344	165 / 367
Shipping	170 / 378	180 / 400
Volume	0.57 CBM / 1 9.97 CBF	

DIMENSIONS	NET (MM/IN)	SHIPPING (MM/IN)
Width	552 / 21.7	620 / 24.4
Depth	652 / 25.7	800 / 31.5
Height	955 / 37.6	1140 / 44.9

ELECTRICAL	AMP	VOLTS	POWER(KW)
220-240/50/1	13	NA	NA
208-230/60/1	13	NA	NA

FEATURES

CONTROL SYSTEMS	SINGLE DIGITAL
REFRIGERATED HOPPERS	<input checked="" type="checkbox"/>
HOPPER AGITATOR AVAILABLE	<input checked="" type="checkbox"/>
TEMPERATURE DISPLAY	<input checked="" type="checkbox"/>
STANDBY MODE	<input checked="" type="checkbox"/>
AUTO CLOSING DISPENSING VALVES	<input checked="" type="checkbox"/>
DISPENSING SPEED CONTROL	<input checked="" type="checkbox"/>
LOW MIX INDICATOR LIGHT	<input checked="" type="checkbox"/>
LOW MIX INDICATOR ALARM	<input checked="" type="checkbox"/>
LOW TEMPERATURE PROTECTION	<input checked="" type="checkbox"/>
MOTOR AMPERAGE PROTECTION	<input checked="" type="checkbox"/>
HIGH PRESSURE PROTECTION	<input checked="" type="checkbox"/>
THERMAL OVERLOAD PROTECTION	<input checked="" type="checkbox"/>
T29A: AIR PUMP VERSION AVAILABLE	<input checked="" type="checkbox"/>

CATERBOSS

Unit 1a, Tullow Industrial Estate, Tullow, Co. Carlow, R93A273 | 01-6875772 | sales@caterboss.ie