


# PASTRY AND CHOCOLATE DISPLAY CASE



# Holes arrangement

on working tops and counters for built-in elements


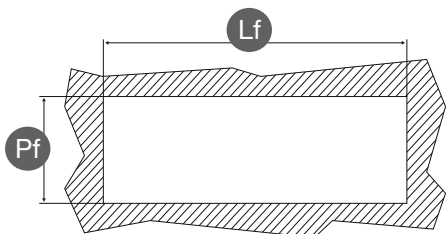


Lf [mm]	775 (max 780)	1100 (max 1105)	1430 (max 1435)
Pf [mm]	675 (max 680)	675 (max 680)	675 (max 680)



customer side view



operator side view

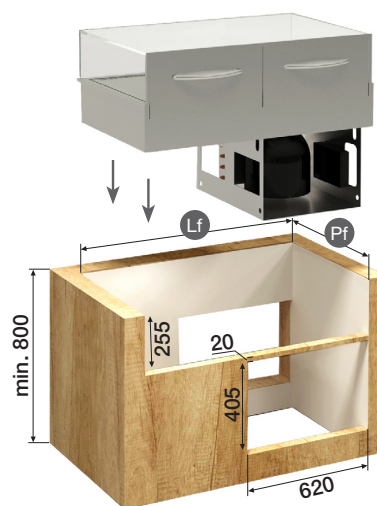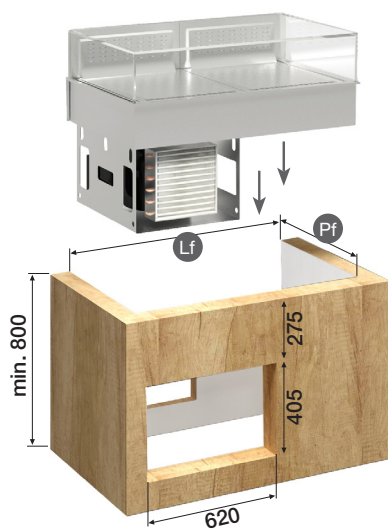

**NB: dimensions in millimetre**

# Display case with drawers pastry line

- ▶ Stainless steel top AISI 304, th. 12/10
- ▶ Closed display case with tempered glass
- ▶ Operator side with drawers on telescopic guides
- ▶ Refrigerated laminar airflow
- ▶ Evaporator with anti-corrosion coating
- ▶ Condensed water drain on bottom (evaporation kit on request)
- ▶ Insulation by high density expanded polyurethane without C.F.C. and H.C.F.C.
- ▶ With condensing unit
- ▶ Digital control system for temperature adjustment and defrosting
- ▶ LED lighting

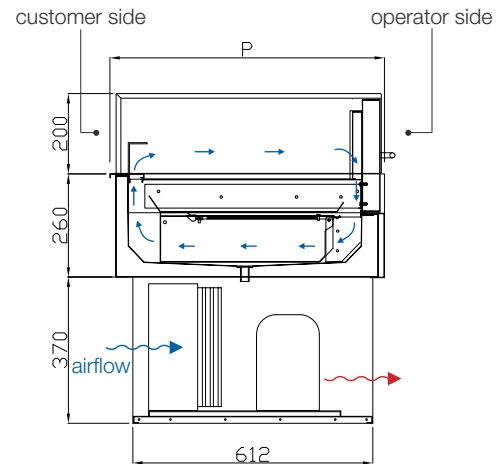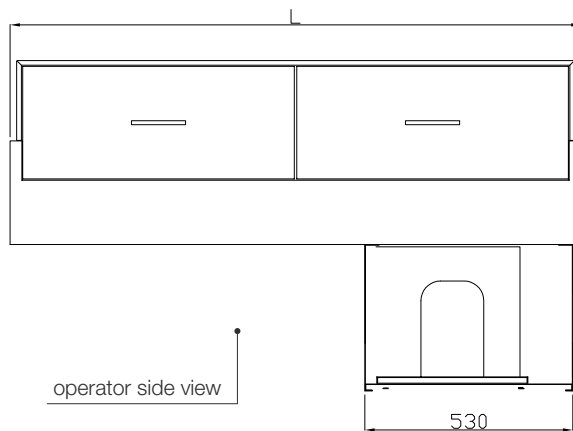

External dimensions [mm] **LxPxH**

N. of drawers

Temperature [°C]

Refrigerant gas

Refrigerant gas quantity [gr]

Total power [Kw]

Supply voltage (50Hz)

800x700x830

1125x700x830

1455x700x830

1

1

2

-1/+7\*

-1/+7\*

-1/+7\*

R452A

R452A

R452A

1000

1100

1200

0,7

0,9

1

230V 1F+N


230V 1F+N

230V 1F+N

\* Classification 2M1 according to UNI EN ISO 23953-1:2006, UNI EN ISO 23953-2:2006  
Climate class 2

# Display case with drawers chocolate line

- ▶ Stainless steel top AISI 304, th. 12/10
- ▶ Cosed display case with tempered glass
- ▶ Operator side with drawers on telescopic guides
- ▶ Refrigerated laminar airflow
- ▶ Humidity control
- ▶ Evaporator with anti-corrosion coating
- ▶ Condensed water drain on bottom (evaporation kit on request)
- ▶ Insulation by high density expanded polyurethane without C.F.C. and H.C.F.C.
- ▶ With condensing unit
- ▶ Digital control system for temperature adjustment and defrosting
- ▶ LED lighting

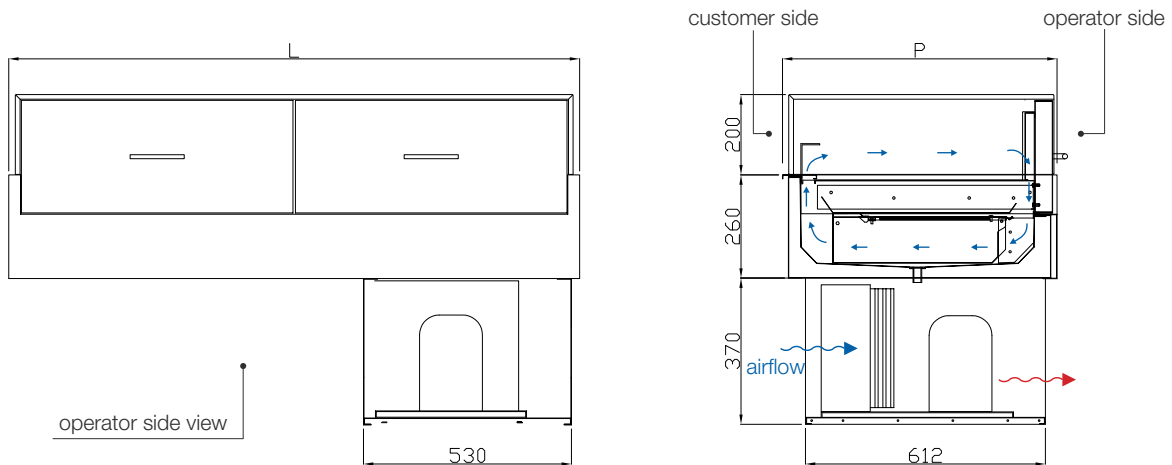

External dimensions [mm] **LxPxH**

N. of drawers

Temperature [°C]

Humidity RH [%]

Refrigerant gas

Refrigerant gas quantity [gr]

Total power [Kw]

Supply voltage (50Hz)

	800x700x830	1125x700x830	1455x700x830
N. of drawers	1	1	2
Temperature [°C]	+14/+18	+14/+18	+14/+18
Humidity RH [%]	40 - 55	40 - 55	40 - 55
Refrigerant gas	R452A	R452A	R452A
Refrigerant gas quantity [gr]	1000	1100	1200
Total power [Kw]	0,7	0,9	1
Supply voltage (50Hz)	230V 1F+N	230V 1F+N	230V 1F+N