


Refrigerated and ventilated tank

- ▶ Stainless steel top AISI 304, th. 12/10
- ▶ Refrigerated laminar airflow
- ▶ Stainless steel height-adjustable blind bottoms (useful height 30-150 mm)
- ▶ Evaporator with anti-corrosion coating, which can be lifted to easily clean the well
- ▶ Condensed water drain on bottom (evaporation kit on request)
- ▶ Insulation by high density expanded polyurethane without C.F.C. and H.C.F.C.
- ▶ With condensing unit or pre-set for remote refrigeration
- ▶ Digital control system for temperature adjustment and defrosting

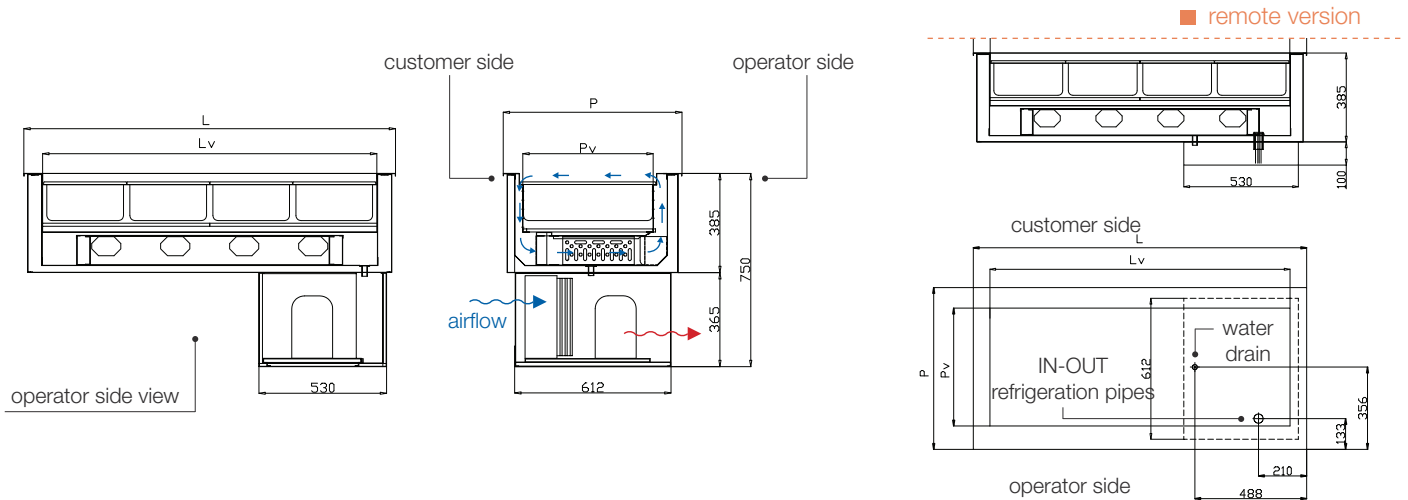

	2 GN1/1	3 GN1/1	4 GN1/1	5 GN1/1
External dimensions [mm] LxP	800x700	1125x700	1455x700	1780x700
Well dimensions [mm] LvxPvxHv	650x510x30/150	980x510x30/150	1310x510x30/150	1630x510x30/150
Capacity GN 1/1 containers	2 GN1/1	3 GN1/1	4 GN1/1	5 GN1/1
Well temperature [C°]	-1/+5*	-1/+5*	-1/+5*	-1/+5*
Refrigerant gas	R452A	R452A	R452A	R452A
Cooling power at -10°C [W]	750	980	1150	1650
Total power [Kw]	0,7	0,9	1	1,2
Supply voltage (50Hz)	230V 1F+N	230V 1F+N	230V 1F+N	230V 1F+N
Diameter inlet gas pipe [mm] ■	6	6	6	10
Diameter outlet gas pipe [mm] ■	10	10	10	12

* Classification 2M1 according to UNI EN ISO 23953-1:2006, UNI EN ISO 23953-2:2006