

**Model**

EP10 & NA10

EP15 & NA15

Product Description

EP10 (Peeler, 4.5Kg, 10lb Medium Duty, Painted Finish)

NA10 (Peeler, 4.5Kg, 10lb Medium Duty, Aluminium Finish)

EP15 (Peeler, 6.8Kg, 15lb Medium Duty, Painted Finish)

NA15 (Peeler, 6.8Kg, 15lb Medium Duty, Aluminium Finish)


Product Code

5P101 (EP10)

5P103 (NA10)

5P151 (EP15)

5P153 (NA15)

**Standard Features**

- 4.5kg (10lb) & 6.8kg (15lb) medium duty potato peelers constructed from food grade, non-corrosive aluminium alloy casting
- Spindle housing and chute cast integrally, eliminating joints and possible leakage
- Available in natural aluminium or a grey hammer paint finish
- Sink-top / counter-top, pedestal or trolley mounted
- Optional pedestal is 90cm high, making the discharge chute 94cm (37") high (sink height)
- Complies with all relevant safety standards and designed for ease of maintenance and cleaning
- All bearings are grease packed and permanently sealed therefore no lubrication required
- V-belt driven for noiseless transmission, with provision for belt tensioning if required
- Rotor plate coated on both sides, doubling its life. Fine grained abrasive for new potatoes on one side and coarse grained for regular potatoes on the other
- Inside wall of peeling chamber has patented cast-in abrasive serrations which dispenses with the need for abrasive coating. Consequently, there is less potato loss during both peeling and boiling and the efficiency of the serrations will last the life of the machine
- Lid removable without tools so that the rotor plate can be lifted out for cleaning. To clean the chamber, turn on water and the whole chamber is flushed clean
- Water inlet: hose union with nozzle and provision for fitting on either side
- Waste/water outlet: tapped 1½ BSP ready for waste pipe to be connected. Provision for fitting on either side
- CE Approved

Standard Accessories

1 x Lifting Hook

1 x Box Spanner

Warranty


Covered by Metcalfe 1-year warranty and full after sales service

Optional Accessories

Item	Product Code
Pedestal	9T20
Mobile Trolley	9T21
Guarded Discharge Chute (Painted Finish)	9T19
Guarded Discharge Chute (Stainless Steel)	9T24
Small External Interceptor	9T22
Small Waste Disposal Adaptor	9T17

Item	Product Code
Sink Skip	TS06
Length of Waste Pipe, Elbow & Coupling	9T18
3ft Length Water Inlet Hose & Tap Connector	9P64
Installation Kit (Sink Skip, Length of Waste Pipe, Elbow & Coupling, 3ft Length Water Inlet Hose & Tap Connector)	9T28
Type 'AA' Air Gap Tundish	9T25

Drawing

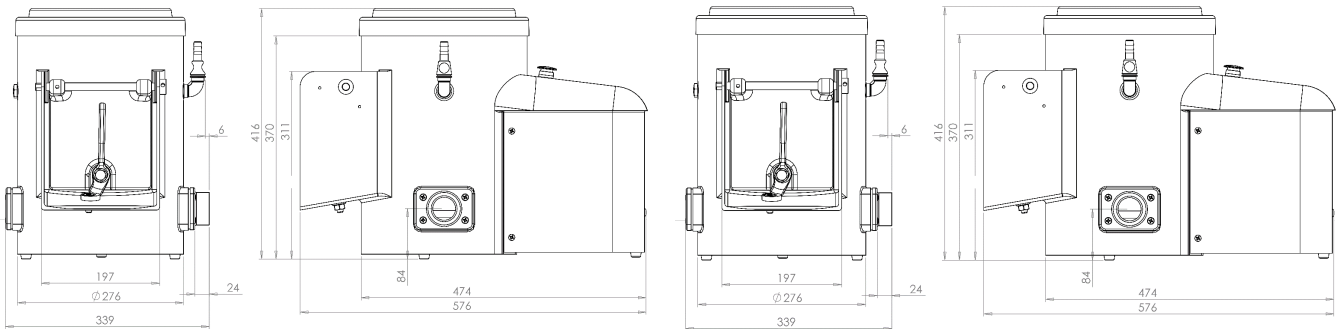

Specifications

Model	Phase (Ø)	Capacity (Kg)	Output (Kg per hour)	Motor (Volt)	Frequency (Hz)	AMP (A)	Power (kW) / (hp)
EP10 & NA10	1	4.5	27	220	50	2.8	0.25 / 0.33
EP15 & NA15	1	6.8	41	220	50	2.8	0.25 / 0.33

Dimensions | Shipping Information

Model	Overall Dimensions D x W x H (mm)	Net Weight (Kg)	Packed Dimensions D x W x H (mm)	Packed Weight (Kg)	Volume (m3)
EP10 & NA10	576 x 339 x 365	27	665 x 265 x 480	30	0.04
EP15 & NA15	576 x 339 x 416	30	665 x 265 x 480	34	0.04

We reserve the right to alter the specification and technical details for this item at any time without prior notice.

9/2021

Metcalf Catering Equipment Ltd

Haygarth Park

Blaenau Ffestiniog

Gwynedd, LL41 3PF

