

GAS FRYER - 17 L



- External paneling in stainless steel
- Work surface in AISI 304, 1.2 mm thick
- Height-adjustable work surface from 855 to 900 mm
- Gas fryer with tank in AISI 304, with rounded corners and moulded bottom for thorough cleaning
- Moulded work surface with front raised edges to collect any oil overflow or foaming
- Large cold zone on the bottom for the deposit of cooking residues
- High Efficiency nickel-plated cast iron burners and heat exchangers inside the tank
- Heating regulation via an electric thermostat safety valve with thermocouple and pilot burner
- Burner ignition via pilot burner
- The tank oil temperature is controlled by a mechanical thermostat with regulation between 100°C and 195°C
- Bulbs protected against accidental impact
- Fryer equipped with removable underlying grid for basket support, basket, lid and drip tray
- Oil drainage via ball valve
- Single tank dimensions 310x345mm with 17 L capacity
- Ergonomic control panel with controls tilted toward the operator
- Height-adjustable stainless steel feet

TECHNICAL SPECIFICATIONS


Dimensions (mm)	400x700x900
Volume (m ³)	0,50
Weight (kg)	68

GAS CONNECTION

kW	16,5
UNI ISO 7\1 R 1/2"	

ELECTRICAL CONNECTION

kW	0,1
Power supply	230V/1N 50Hz
Cold water inlet	

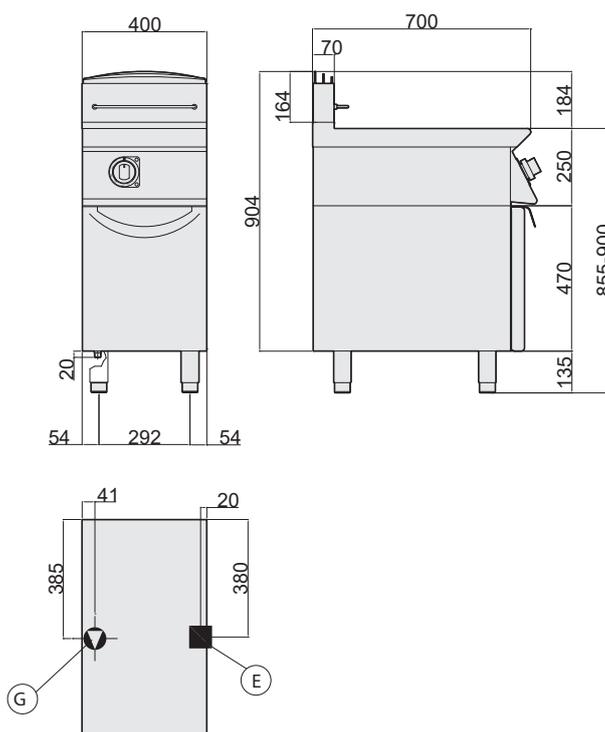

- Ⓐ water fill
- Ⓒ hot water fill
- Ⓔ electrical input
- Ⓕ cold water fill
- Ⓖ gas inlet
- Ⓗ water drain

